


PAULOWNIA PLYWOOD

TECHNICAL DATASHEET

ORIGIN

China

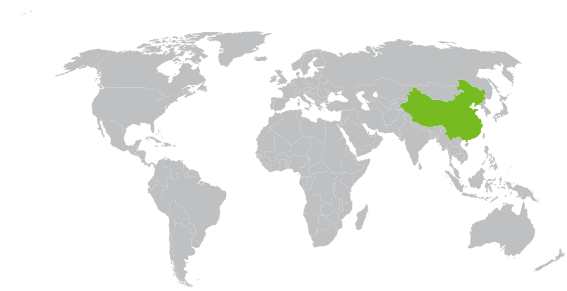


SPECS

- Knot-free faces
- Surface sanded and brushed
- Great dimensional stability
- Indoor and outdoor use

PHYSICAL PROPERTIES*

- Apparent density at 12% humidity 290 Kg/m³.
Very light wood.

MECHANICAL PROPERTIES*

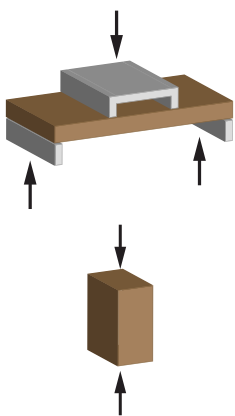

- Resistance to static bending: 243 kg/cm²
- Modulus of Elasticity: 24.915 kg/cm²
- Resistance to axial compression: 126 kg/cm²


FORMALDEHYDE*

- Formaldehyde emission class 1 according to UNE EN 717-2.

MECHANITZATION

- Sawed-off without problems
- Drying time: very fast.
- Brushed: without problems.
- Gluing: without difficulties.
- Nailed and screwed: easy.
- Finished: no difficulties.

MEASURES

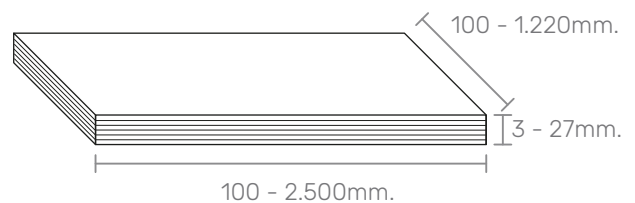

CERTIFICATIONS

Samples tested by
INCAFUST

* Tests conducted by INCAFUST-CTFC